

ROLL JACKS 3072™ TOP CARRIAGE STABILIZATION.


iTOOLco.

WARNING: FAILURE TO INSERT 5/8" BOLTS MAY CAUSE DAMAGE TO TOOL OR HARM TO USER.

1.) When your Roll Jack 3072 Arrives, the top cross member will be resting at the base of the unit.



2.) Using a forklift, raise the cross member until the two bolt holes positioned on the sides of the sliding arms are aligned.

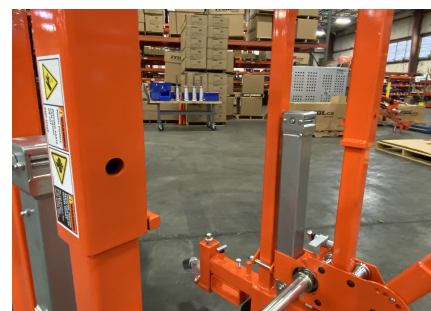

3.) Insert 5/8" Bolts on both sides, tighten.

