
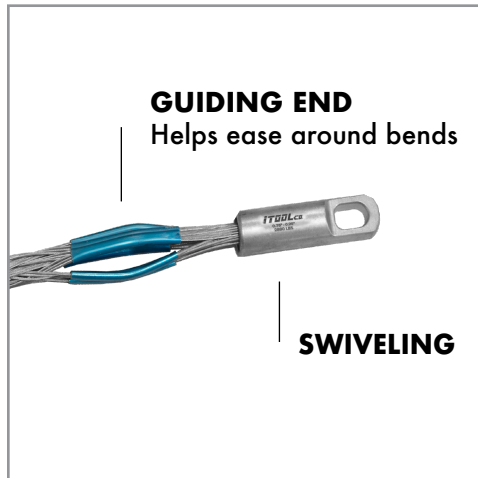



PULLING SOCKS™

STRONG, REUSABLE, RELIABLE.


iTOOLco.

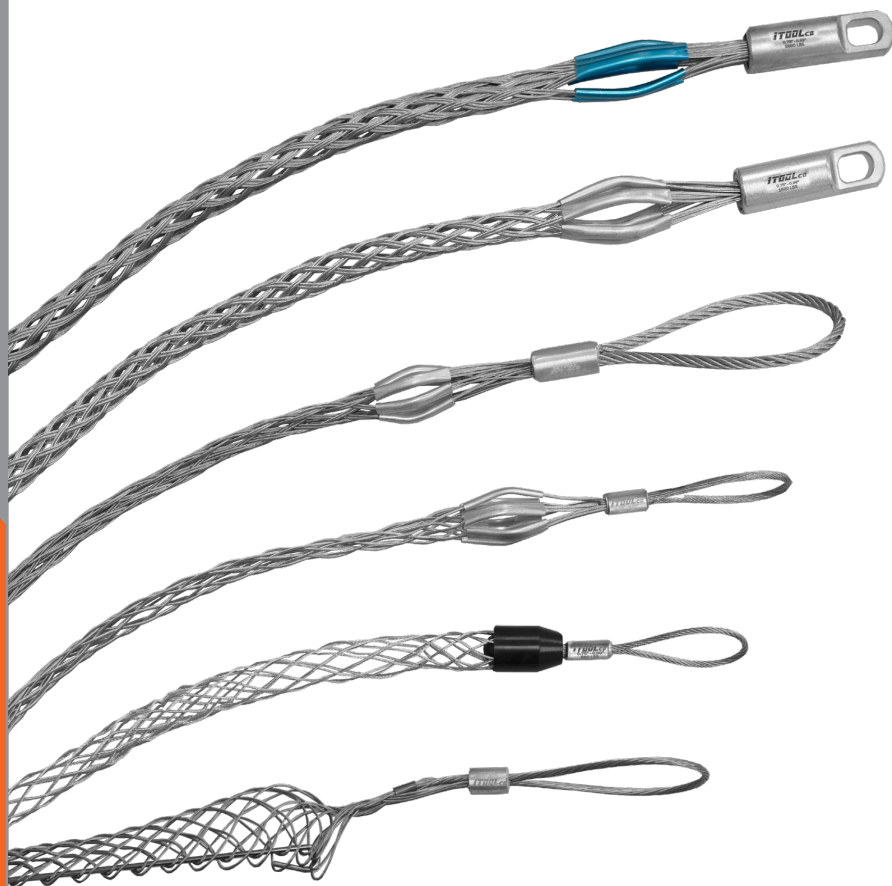

Heavy Duty

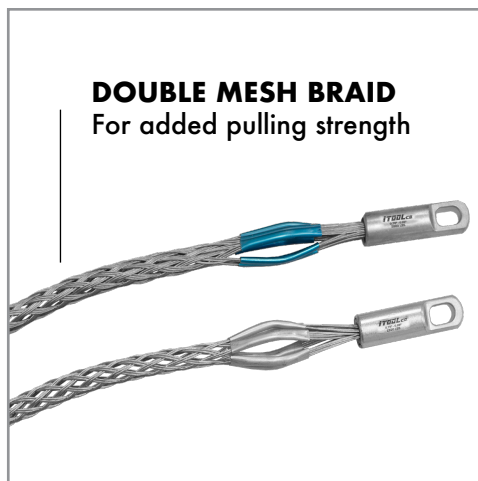

Regular Duty

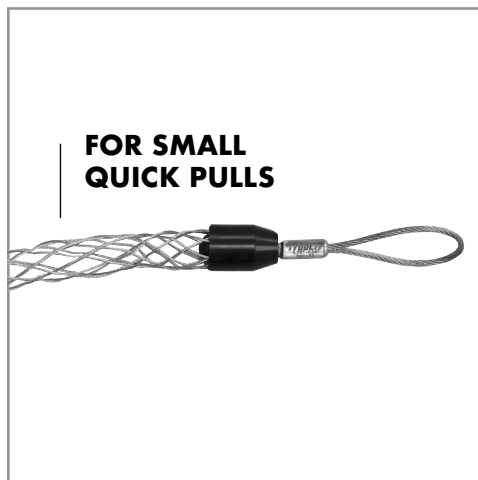

Light Duty

When pulling electrical cable underground, overhead in commercial applications, iTOOLco reusable Pulling Socks™ are indispensable. These tough Pulling Socks™ deliver strength, durability and reliability for any indoor or outdoor application - wet or dry. Simply insert cable end into the appropriately sized sock, then stretch out. The harder you pull, the harder they grip.

Available in a variety of sizes for light to heavy duty jobs, iTOOLco Pulling Socks™ protect from abrasion and ease the cable gently through bends and rough surfaces. They are perfect for removing old cable or pulling slack in new construction or maintenance operations. Easy-to-use and maximum endurance make iTOOLco Pulling Socks™ the industry standard in cable pulling socks.

Website



FASTER SAFER WORKSPACE

iTOOLco.com / 865-670-3713

PULLING SOCKS™

STRONG, REUSEABLE, RELIABLE.

iTOOLco.

Wire Size (Fits One Conductor)	Model	SKU #	DIA	Overall Length	Ultimate Holding Value
--------------------------------------	-------	-------	-----	-------------------	------------------------------



JUNIOR DUTY

#6 - #4	JR019	650270084219	.19" - .24"	19"	80 lb.
#4 - #1	JR025	650270084226	.25" - .36"	9"	90 lb.
1/0 - 4/0	JR037	650270084233	.37" - .49"	11"	180 lb.
3/0 - 250	JR050	650270084240	.5" - .61"	15"	260 lb.
250 - 400	JR062	650270084257	.62" - .74"	18"	390 lb.
500 - 750	JR075	650270084264	.75" - .99"	18"	560 lb.
800 - 1000	JR100	650270084271	1" - 1.24"	25"	780 lb.



LIGHT DUTY

4/0 - 250	LD050	650270084288	.5" - .61"	26"	560 lb.
300 - 400	LD062	650270084295	.62" - .74"	27"	560 lb.
500 - 750	LD075	650270084301	.75" - .99"	30"	800 lb.
800 - 1000	LD100	650270084318	1" - 1.24"	35"	1360 lb.
1000-1500	LD125	650270084325	1.25" - 1.49"	38"	1360 lb.
	LD150	650270084332	1.5" - 1.99"	39"	1360 lb.
	LD200	650270084349	2" - 2.49"	44"	1700 lb.
	LD250	650270084356	2.5" - 2.99"	47"	2120 lb.
	LD300	650270084363	3" - 3.49"	50"	2940 lb.
	LD350	650270084370	3.5" - 3.99"	60"	2940 lb.



REGULAR DUTY

4/0 - 250	RD050S	650270084387	.5" - .61"	21"	900 lb.
300 - 400	RD062S	650270090234	.62" - .74"	24"	1120 lb.
500 - 700	RD075	650270093174	.75" - .99"	36"	1360 lb.
500 - 750	RD075S	650270090586	.75" - .99"	24"	1360 lb.
1000-2000	RD100	650270088187	1" - 1.49"	36"	1920 lb.
1000-2000	RD100S	650270092795	1" - 1.49"	24"	1920 lb.
	RD150	650270090838	1.5" - 1.99"	36"	3280 lb.
	RD150S	650270085216	1.5" - 1.99"	24"	3280 lb.
	RD200	650270090166	2" - 2.49"	36"	3700 lb.
	RD200S	650270086954	2" - 2.49"	24"	3700 lb.
	RD250	650270091903	2.5" - 2.99"	36"	4900 lb.
	RD250S	650270084424	2.5" - 2.99"	24"	4900 lb.
	RD300	650270089368	3" - 3.49"	36"	4900 lb.
	RD300S	650270092030	3" - 3.49"	24"	4900 lb.
	RD350	650270092955	3.5" - 3.99"	36"	6200 lb.
	RD350S	650270088972	3.5" - 3.99"	24"	6200 lb.

Wire Size (Fits One Conductor)	Model	SKU #	DIA	Overall Length	Ultimate Holding Value
--------------------------------------	-------	-------	-----	-------------------	------------------------------



SPLIT MESH

4/0 - 250	SM050	650270087470	.6" - .61"	7"	300 lb.
300 - 400	SM062	650270086459	.62" - .74"	7"	360 lb.
500 - 750	SM075	650270091385	.75" - .99"	7"	440 lb.
800 - 1000	SM100	650270092917	1" - .99"	8"	680 lb.
1000-1500	SM125	650270084455	1.25" - 1.49"	8"	900 lb.
	SM150	650270085148	1.5" - 1.174"	9"	1160 lb.
	SM175	650270085445	1.75" - 1.99"	10"	1520 lb.
	SM200	650270085094	2" - 2.49"	10"	1800 lb.
	SM250	650270084639	2.5 - 2.99"	10"	2200 lb.
	SM300	650270088316	3" - 3.49"	12"	2400lb.
	SM350	650270084318	3.5" - 3.99"	12"	2400lb.



SWIVELING REGULAR DUTY

4/0 - 250	SW050	650270086671	.5" - .61"	16"	1120 lb.
300 - 400	SW062	650270085339	.62" - .74"	16"	1360 lb.
500 - 750	SW075	650270080197	.75" - .99"	32"	1920 lb.
4/0 - 900	SW100	650270087005	1" - 1.49"	33"	2120 lb.
	SW150	650270086800	1.5" - 1.99"	34"	3280 lb.
	SW200	650270082948	2" - 2.49"	36"	5440 lb.
	SW250	650270088903	2.5" - 2.99"	38"	6600 lb.
	SW300	650270092085	3" - 3.49"	39"	8200 lb.
	SW350	650270090845	3" - 3.99"	41"	9600 lb.
	SW400	650270088767	4" - 4.49"	52"	9600 lb.
	SW450	650270086268	4.5" - 4.99"	58"	9600 lb.
	SW500	650270066268	5" - 5.99"	60"	9600 lb.
	SW600	650270089252	6" - 6.99"	66"	9600 lb.



SWIVELING HEAVY DUTY

#3 - 3/0	SWHD025	650270087678	.25" - .49"	26"	1360 lb.
3/0 - 400	SWHD050	650270090210	.5" - .74"	32"	2000 lb.
500 - 750	SWHD075	650270092146	.75" - .99"	41"	2880 lb.
800-1000	SWHD100	650270085490	1" - 1.24"	52"	4920 lb.
1000-1500	SWHD125	650270084806	1.25" - 1.48"	56"	6120 lb.
	SWHD150	650270091743	1.5" - 1.74"	60"	6120 lb.
	SWHD175	650270086411	1.75" - 2"	70"	9600 lb.
	SWHD200	650270088354	2" - 2.48"	50"	9600 lb.
	SWHD250	650270087821	2.5" - 2.99"	52"	9600 lb.
	SWHD300	650270089986	3" - 3.48"	54"	9600 lb.
	SWHD350	650270088541	3.5" - 3.99"	56"	6600 lb.

Patent Pending

PULLING SOCKS™
STRONG, REUSEABLE, RELIABLE.

iTOOLco.

WIRE SIZE BREAKDOWN

Standard Wire Size Averages				Diameter Of Multiple Wires Together			
AWG / kcmil	Strands	Dia mm	Dia Inches	1 Wire	2 Wires	3 Wires	4 Wires
14	solid	2.6	0.102	0.10	0.15	0.22	0.25
12	solid	3.02	0.118	0.12	0.18	0.26	0.29
10	solid	3.81	0.149	0.15	0.22	0.33	0.36
14	19	2.78	0.109	0.11	0.16	0.24	0.27
12	19	3.27	0.128	0.13	0.19	0.28	0.31
10	19	4.11	0.161	0.16	0.24	0.35	0.39
8	19	5.43	0.213	0.21	0.32	0.47	0.52
6	19	6.36	0.249	0.25	0.37	0.55	0.61
4	19	8.11	0.318	0.32	0.48	0.70	0.77
3	19	8.82	0.346	0.35	0.52	0.76	0.84
2	19	9.63	0.378	0.38	0.57	0.83	0.92
1	19	11.09	0.435	0.44	0.65	0.96	1.06
1/0	19	12.08	0.474	0.47	0.71	1.04	1.15
2/0	19	13.34	0.523	0.52	0.78	1.15	1.27
3/0	19	14.64	0.574	0.57	0.86	1.26	1.40
4/0	19	16.04	0.629	0.63	0.94	1.38	1.53
250	37	17.79	0.698	0.70	1.05	1.54	1.70
300	37	19.09	0.749	0.75	1.12	1.65	1.82
350	37	20.39	0.8	0.80	1.20	1.76	1.95
400	37	21.49	0.843	0.84	1.26	1.85	2.05
500	37	23.59	0.925	0.93	1.39	2.04	2.25
600	61	26.17	1.026	1.03	1.54	2.26	2.50
750	61	28.77	1.128	1.13	1.69	2.48	2.75
1000	61	32.57	1.277	1.28	1.92	2.81	3.11

Patent Pending