
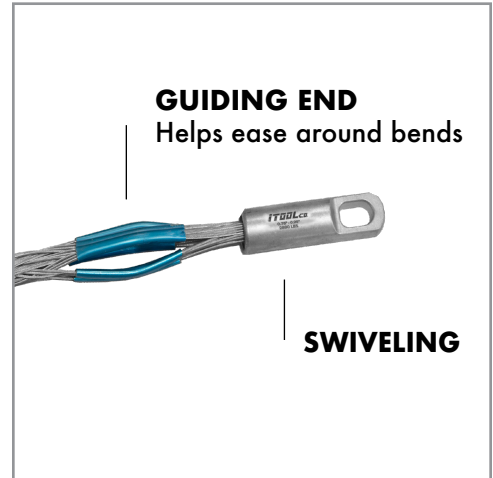


PULLING SOCKS™

STRONG, REUSABLE, RELIABLE.

iTOOLco.

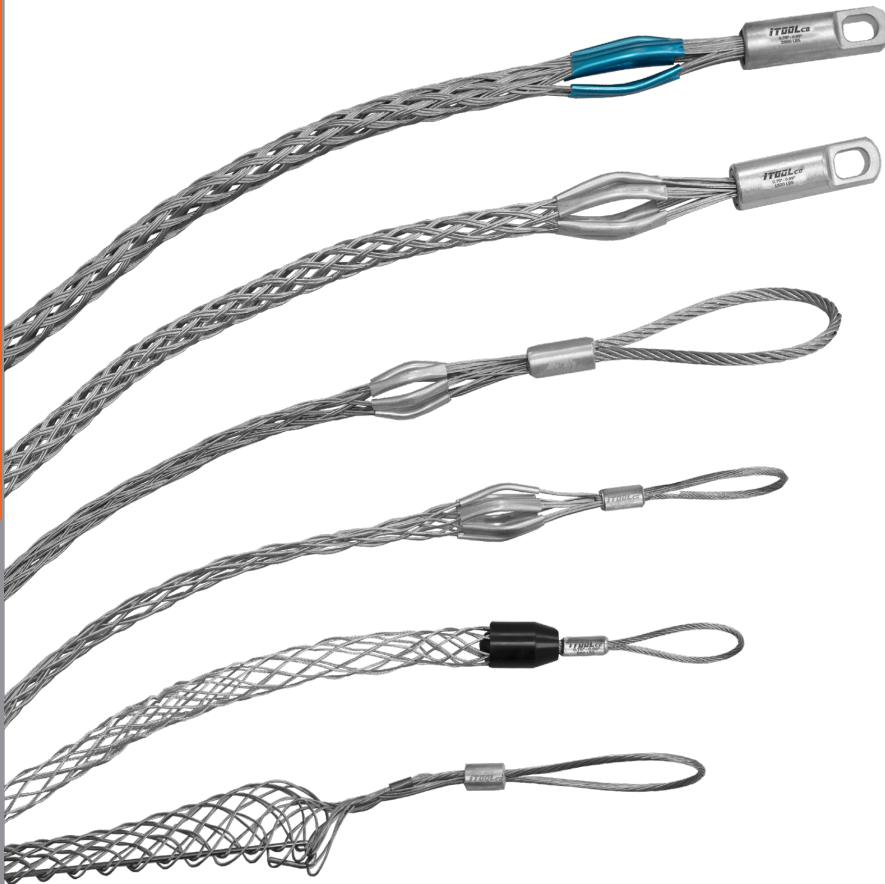


GUIDING END

Helps ease around bends

SWIVELING


Heavy Duty

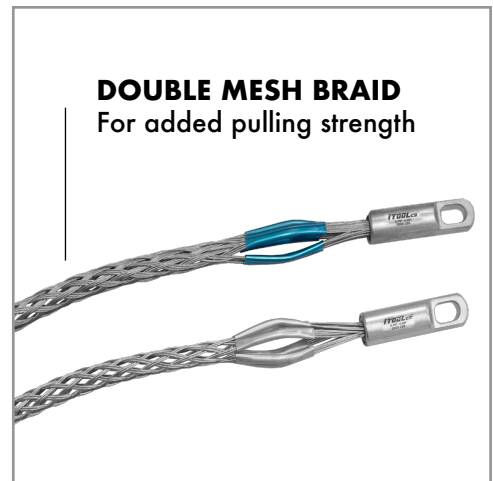

DOUBLE MESH BRAID

For added pulling strength

Regular Duty

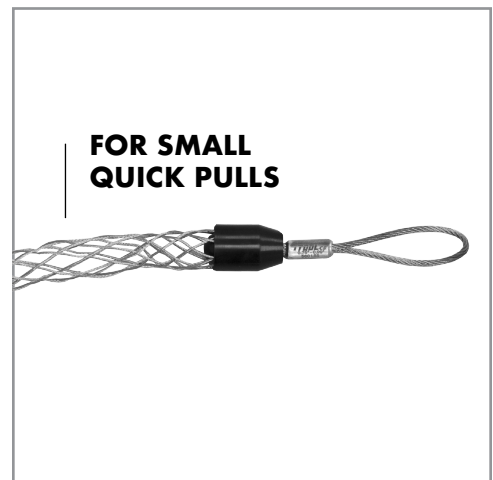

FOR SMALL QUICK PULLS

Light Duty

FASTER SAFER WORKSPACE

When pulling electrical cable underground, overhead in commercial applications, iTOOLco reusable Pulling Socks™ are indispensable. These tough Pulling Socks™ deliver strength, durability and reliability for any indoor or outdoor application - wet or dry. Simply insert cable end into the appropriately sized sock, then stretch out. The harder you pull, the harder they grip.

Available in a variety of sizes for light to heavy duty jobs, iTOOLco Pulling Socks™ protect from abrasion and ease the cable gently through bends and rough surfaces. They are perfect for removing old cable or pulling slack in new construction or maintenance operations. Easy-to-use and maximum endurance make iTOOLco Pulling Socks™ the industry standard in cable pulling socks.


Webpage





PULLING SOCKS™


STRONG, REUSABLE, RELIABLE.


iTOOLCo.


Model	SKU #	DIA	Mesh Length	Ultimate Holding Value
 JUNIOR DUTY				
JR019	650270084219	.19" - .24"	4.25"	80 lb.
JR025	650270084226	.25" - .36"	4.25"	90 lb.
JR037	650270084233	.37" - .49"	7"	180 lb.
JR050	650270084240	.5" - .61"	8.5"	260 lb.
JR062	650270084257	.62" - .74"	10"	390 lb.
JR075	650270084264	.75" - .99"	10"	560 lb.
JR100	650270084271	1" - 1.24"	11.5"	780 lb.

Model	SKU #	DIA	Mesh Length	Ultimate Holding Value
 LIGHT DUTY				
LD050	650270084288	.5" - .61"	16"	560 lb.
LD062	650270084295	.62" - .74"	16"	560 lb.
LD075	650270084301	.75" - .99"	20"	800 lb.
LD100	650270084318	1" - 1.24"	20"	1360 lb.
LD125	650270084325	1.25" - 1.49"	21"	1360 lb.
LD150	650270084332	1.5" - 1.99"	23"	1360 lb.
LD200	650270084349	2" - 2.49"	25"	1700 lb.
LD250	650270084356	2.5" - 2.99"	27"	2120 lb.
LD300	650270084363	3" - 3.49"	30"	2940 lb.
LD350	650270084370	3.5" - 3.99"	32"	2940 lb.

Model	SKU #	DIA	Mesh Length	Ultimate Holding Value
 REGULAR DUTY				
RD050S	650270084387	.5" - .61"	21"	900 lb.
RD062S	650270090234	.62" - .74"	24"	1120 lb.
RD075	650270093174	.75" - .99"	36"	1360 lb.
RD075S	650270090586	.75" - .99"	24"	1360 lb.
RD100	650270088187	1" - 1.49"	36"	1920 lb.
RD100S	650270092795	1" - 1.49"	24"	1920 lb.
RD150	650270090838	1.5" - 1.99"	36"	3280 lb.
RD150S	650270085216	1.5" - 1.99"	24"	3280 lb.
RD200	650270090166	2" - 2.49"	36"	3700 lb.
RD200S	650270086954	2" - 2.49"	24"	3700 lb.
RD250	650270091903	2.5" - 2.99"	36"	4900 lb.
RD250S	650270084424	2.5" - 2.99"	24"	4900 lb.
RD300	650270089368	3" - 3.49"	36"	4900 lb.
RD300S	650270092030	3" - 3.49"	24"	4900 lb.
RD350	650270092955	3.5" - 3.99"	40"	6200 lb.
RD350S	650270088972	3.5" - 3.99"	26"	6200 lb.

Model	SKU #	DIA	Mesh Length	Ultimate Holding Value
 SPLIT MESH				
SM050	650270087470	.5" - .61"	6"	300 lb.
SM062	650270086459	.62" - .74"	8"	360 lb.
SM075	650270091385	.75" - .99"	10"	440 lb.
SM100	650270092917	1" - 1.24"	12"	680 lb.
SM125	650270084455	1.25" - 1.49"	14"	900 lb.
SM150	650270085148	1.5" - 1.74"	15"	1160 lb.
SM175	650270085445	1.75" - 1.99"	16"	1520 lb.
SM200	650270085094	2" - 2.49"	19"	1800 lb.
SM250	650270084639	2.5" - 2.99"	20"	2200 lb.
SM300	650270088316	3" - 3.49"	21"	2400 lb.
SM350	650270091668	3.5" - 3.99"	24"	2400 lb.

Model	SKU #	DIA	Mesh Length	Ultimate Holding Value
 SWIVELING REGULAR DUTY				
SW050	650270086671	.5" - .61"	16"	1120 lb.
SW062	650270085339	.62" - .74"	16"	1360 lb.
SW075	650270080197	.75" - .99"	32"	1920 lb.
SW100	650270087005	1" - 1.49"	33"	3280 lb.
SW150	650270086800	1.5" - 1.99"	34"	3280 lb.
SW200	650270092948	2" - 2.49"	36"	5440 lb.
SW250	650270088903	2.5" - 2.99"	38"	6600 lb.
SW300	650270092085	3" - 3.49"	39"	8200 lb.
SW350	650270090845	3.5" - 3.99"	41"	9600 lb.
SW400	650270088767	4" - 4.49"	42"	9600 lb.
SW450	650270086268	4.5" - 4.99"	58"	9600 lb.
SW500	650270086626	5" - 5.99"	60"	9600 lb.
SW600	650270089252	6" - 6.99"	66"	9600 lb.

Model	SKU #	DIA	Mesh Length	Ultimate Holding Value
 SWIVELING HEAVY DUTY				
SWHD025	650270087678	.25" - .49"	26"	1360 lb.
SWHD050	650270090210	.5" - .74"	32"	2000 lb.
SWHD075	650270092146	.75" - .99"	41"	2880 lb.
SWHD100	650270085490	1" - 1.24"	52"	4920 lb.
SWHD125	650270084806	1.25" - 1.49"	56"	6120 lb.
SWHD150	650270091743	1.5" - 1.74"	60"	6120 lb.
SWHD175	650270086411	1.75" - 2"	70"	9600 lb.
SWHD200	650270088354	2" - 2.49"	50"	9600 lb.
SWHD250	650270087821	2.5" - 2.99"	52"	9600 lb.
SWHD300	650270089986	3" - 3.48"	54"	9600 lb.
SWHD350	650270085841	3.5" - 3.99"	56"	9600 lb.

Patent Pending

PULLING SOCKS™
STRONG, REUSEABLE, RELIABLE.



WIRE SIZE BREAKDOWN

Standard Wire Size Averages				Diameter Of Multiple Wires Together			
AWG / kcmil	Strands	Dia mm	Dia Inches	1 Wire	2 Wires	3 Wires	4 Wires
14	solid	2.6	0.102	0.10	0.15	0.22	0.25
12	solid	3.02	0.118	0.12	0.18	0.26	0.29
10	solid	3.81	0.149	0.15	0.22	0.33	0.36
14	19	2.78	0.109	0.11	0.16	0.24	0.27
12	19	3.27	0.128	0.13	0.19	0.28	0.31
10	19	4.11	0.161	0.16	0.24	0.35	0.39
8	19	5.43	0.213	0.21	0.32	0.47	0.52
6	19	6.36	0.249	0.25	0.37	0.55	0.61
4	19	8.11	0.318	0.32	0.48	0.70	0.77
3	19	8.82	0.346	0.35	0.52	0.76	0.84
2	19	9.63	0.378	0.38	0.57	0.83	0.92
1	19	11.09	0.435	0.44	0.65	0.96	1.06
1/0	19	12.08	0.474	0.47	0.71	1.04	1.15
2/0	19	13.34	0.523	0.52	0.78	1.15	1.27
3/0	19	14.64	0.574	0.57	0.86	1.26	1.40
4/0	19	16.04	0.629	0.63	0.94	1.38	1.53
250	37	17.79	0.698	0.70	1.05	1.54	1.70
300	37	19.09	0.749	0.75	1.12	1.65	1.82
350	37	20.39	0.8	0.80	1.20	1.76	1.95
400	37	21.49	0.843	0.84	1.26	1.85	2.05
500	37	23.59	0.925	0.93	1.39	2.04	2.25
600	61	26.17	1.026	1.03	1.54	2.26	2.50
750	61	28.77	1.128	1.13	1.69	2.48	2.75
1000	61	32.57	1.277	1.28	1.92	2.81	3.11

Patent Pending